



□□□□ □□□□	23 □□□□
□□□□ □ □□□□□□□	□□□□ □□□□ □□□□□□□□ (□□□)
□□□ □ □□□□	200 □□□□ (□□□ □ □□□□□□ □□□ □ □□□ □)
□□□□□□	800-1000 □□□□





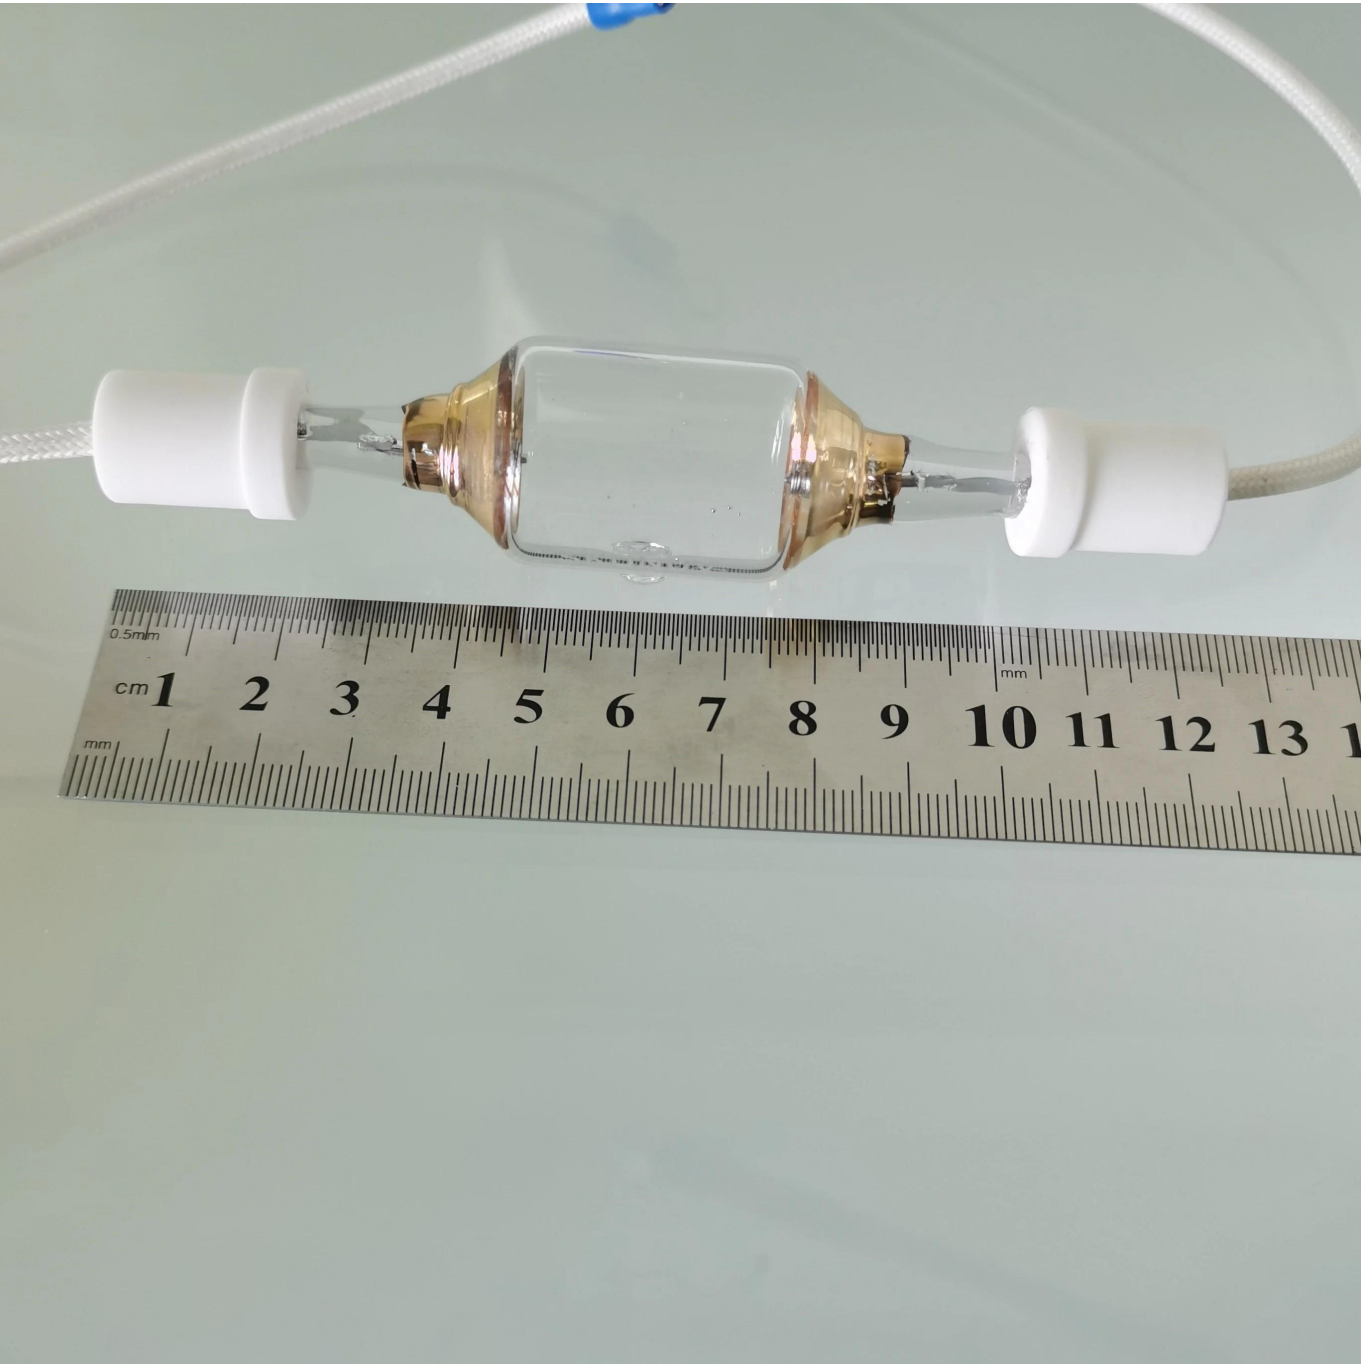

Cooper coated with Glass Fiber covered, insulativity, Thermostability, Anti-aging, Anti-scratch. PTFE Wire: Cooper Coated with PTFE Covered , Keep smooth, and conductivity with little lost.

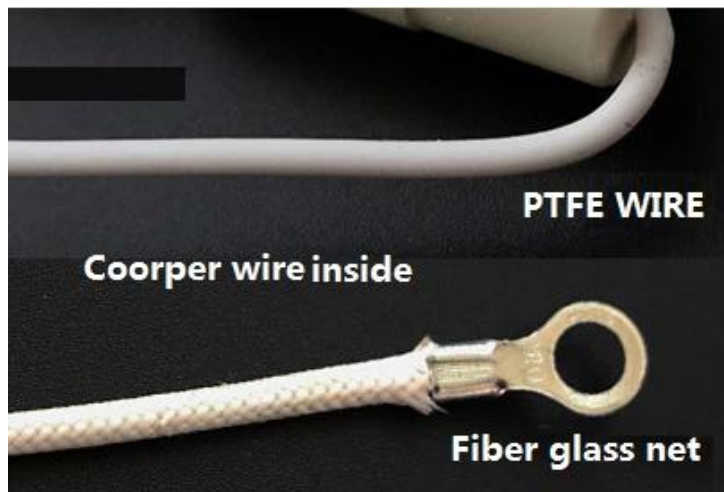

Pure tungsten wire in electrode, keep less wearing. and longer life time
High quality with competitive price.

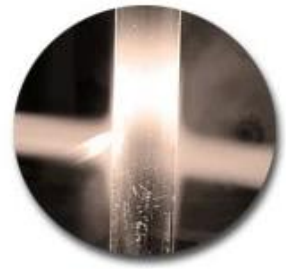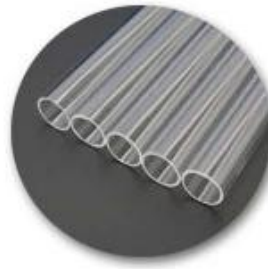


Quartz Tube with coated end
Avarage life time: 1000hours



UV lamps head style diffrent for choice

QUOTE FORM

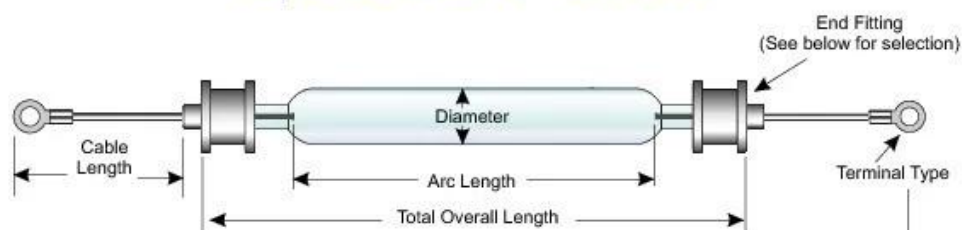

Please refer to the diagram above when answering the following questions

Your Name _____
 Company _____
 Phone _____
 Email _____

Terminal Type		
# 1	# 2	# 3

		Lamp Dimensions			Connectors		Cable Length		Lamp Electrical Data		
Item	Qty	Total Length	Arc Length	Diameter	End Fitting Style	Terminal Type	Left	Right	Voltage	Current	Power

End Fittings



See back for end fitting dimensions.

NEWPLANET

www.irlight.cn

Standard UV

365nm UV

Metal Halide

IR lamps


Microwave

•UV mercury lamp show



•UV mercury lamp radiation spectrum


Standard Mercury Lamp

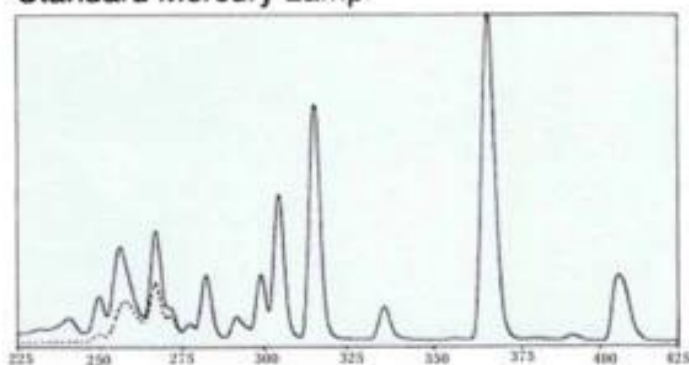

www.irlight.cn

•UV Halide lamp radiation spectrum

Iron Metal Halide Lamp

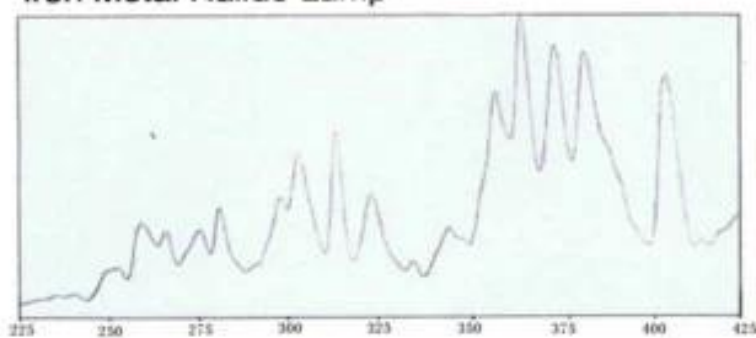

www.irlight.cn