






□□□□ □□□□□□:

□□□□ □□□□ □□□□□□□□ □□□

□□□□□□□□□□ □□□□□ □□□□□□□

□□□□□ □□□□□□□□ □□ □□□ □□□□□ □□□□□□□□□□ □□□□ □□□□□□

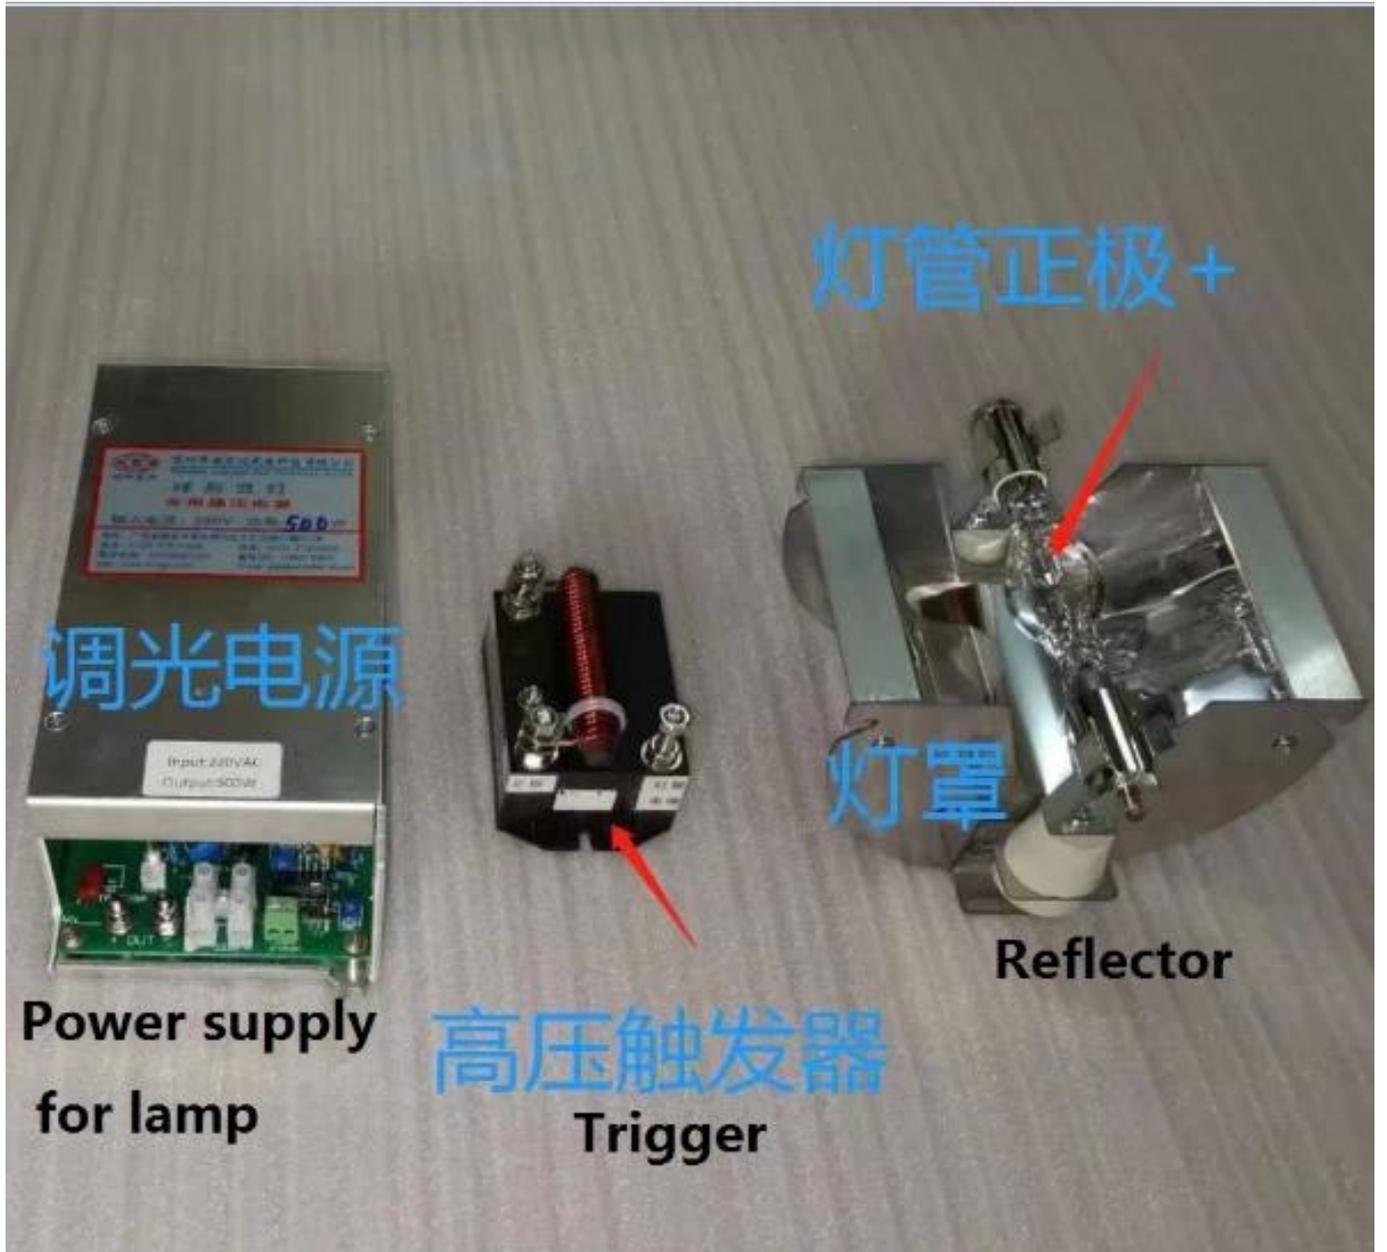

TYPE	Operating current	Operating voltage	Luminous Flux	Average Life time	Wind cooling speed	Electrode distance	NO.
型号	工作电流 (A)	工作电压 (V)	光通量 (lm)	平均寿命 (h)	风冷速度 (M/sec)	极间距离 (mm)	图号
XHA50	4	12.5	1300	400	5	0.6	2
XHA75	5	14	1400	500	5	1.5	2
XHA150	8.5	18	3200	800	5	2.6	3
XHA150/TC	8.5	18	3200	800	5	2.6	1
XHA250/TC	16	16	4800	800	5	2	1
XHA250	16	16	4800	800	5	2	3
XHA350/TC	16	22	11500	800	5	3	1
XHA350	16	22	11500	800	5	3	3
XHA450	25	18	13000	1000	5	2.7	5
XHA500	25	20	14200	1000	5	4	6
XHA500/H	28	17	14500	800	5	4	5
XHA750	33	23	24000	800	5	3.7	6

