


_____**:**

250w/400w/500w/1kw/2kw/3kw/4kw/5kw/5.6kw/8kw/9kw/9.6kw/11kw/12kw25kw
210∏410nm
365nm
120[]2500mm
18mm/22mm/25mm/26mm/28mm/32mm/35mm
95%
00 300mm (0000000000)





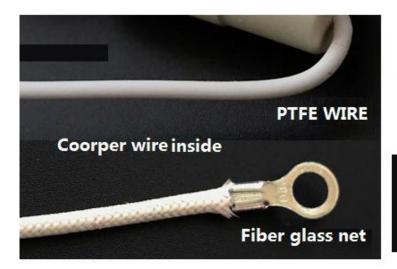





Cooper coated with Glass Fiber covered, insulativity, Thermostability, Anti-aging, Anti-scratch. PTFE Wire: Cooper Coated with PTFE Covered, Keep smooth, and conductivity with little lost.







Pure tungsten wire in electode, keep less wearing. and longer life time High quality with competitive price.

____GE

 $\verb| | | | | | | | | | | | 18mm 22mm 28mm 32mm$

