

## 3kw 220V 270mm 420nm galium 🔲 UV 🔟 🗀


00 **UV** 00 00 00.





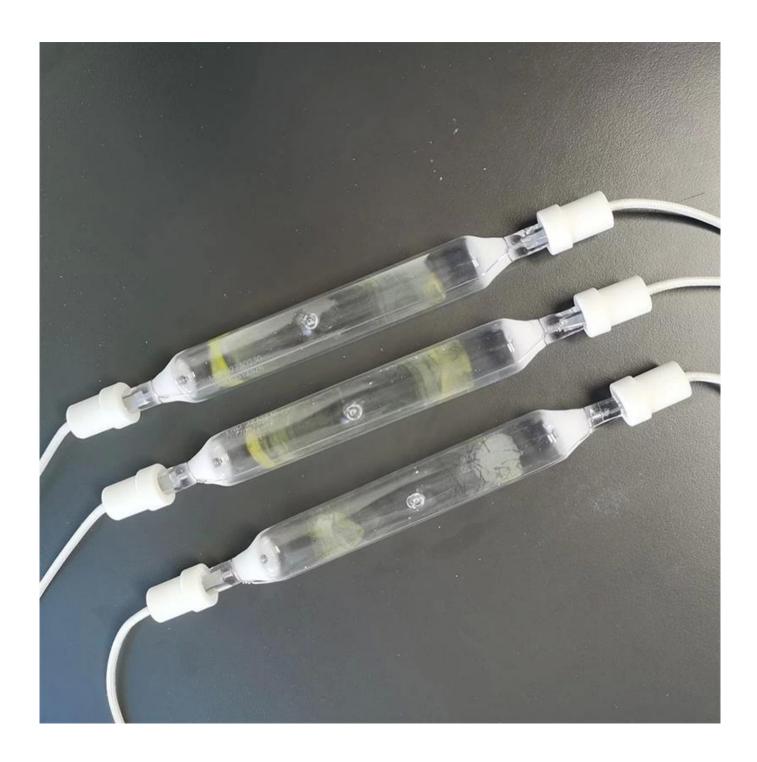

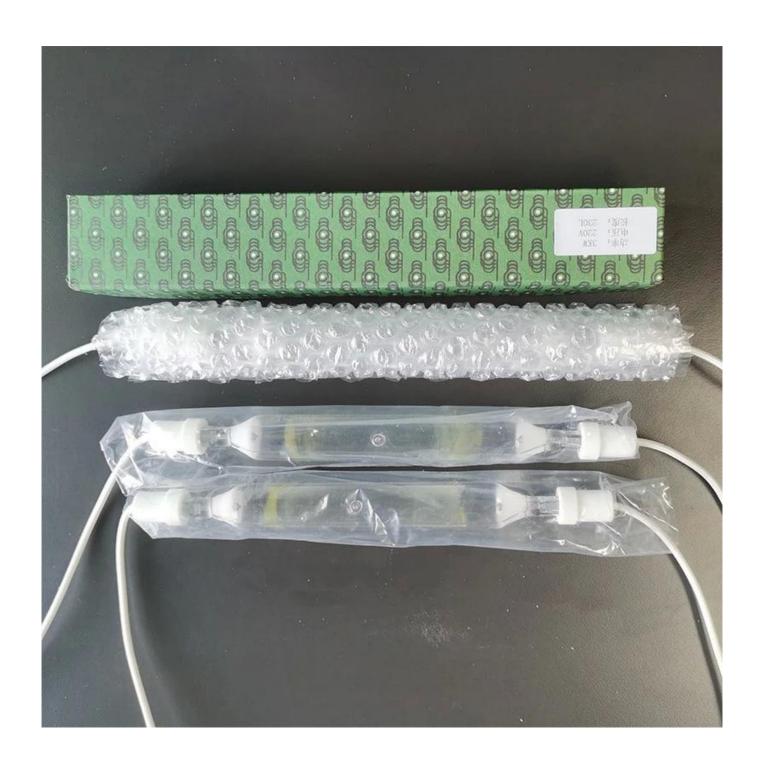

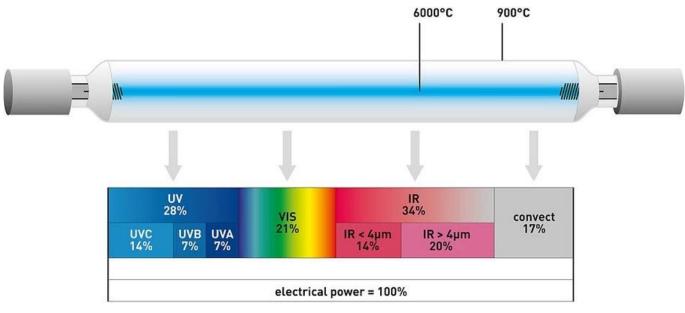


## 00 00 00 00:

250W/400W/500W/1kw/2kw/3kw/4kw/5kw/5kw/8kw/8kw/9kw/9.6kw/11kw/12kw 25kw
210-410NM
365nm
120-2500mm
18mm/22mm/25mm/26mm/28mm/32mm/35mm
95%
00 300mm (000 00 0 00)
UV 00, UV 000, UV 000 , UV 00 00 00 00 00 00







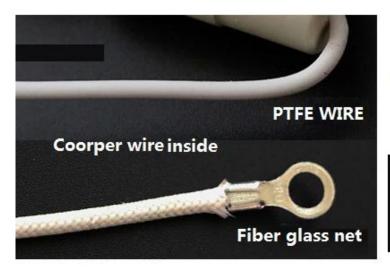





Cooper coated with Glass Fiber covered, insulativity, Thermostability, Anti-aging, Anti-scratch. PTFE Wire: Cooper Coated with PTFE Covered, Keep smooth, and conductivity with little lost.







Pure tungsten wire in electode, keep less wearing.
and longer life time
High quality with competitive price.

 $\qquad \qquad \square \square \square :$ 

□ □□ □□ **GE** 

 $000\ 0000\ 00\ 0\ 00\ 0$ 

□□ □□ : 18mm 22mm 28mm 32mm

