

**Exporter From China Electronic Ballast Equal To Philips Electronic ballast PW12-425-18
UV Electronic Ballasts**

AC Source: 198~264V

Mains Frequency: 50/60Hz

Power Factor: >0.5typ.

Efficiency: >90% typ.

Operating Frequency: 30-40KHz

Dimensions: 85*43*27 mm

Disconnect Input Power Before Installing or Servicing

Don't short any two wires of the input and output wires Ballast Case Must Be Grounded



Type

Input power(W)

Input Current(A)

Power /lamp(W)



PW12-425-18W

10-18W

Max.0.35-230

 $1 \cdot 10^{-18}$

Current(A)	0.35-0.42
Weight(KG)	0.25
Packing (CM)	35.2*21.8*29.3
Quantity	40PCS /Carton

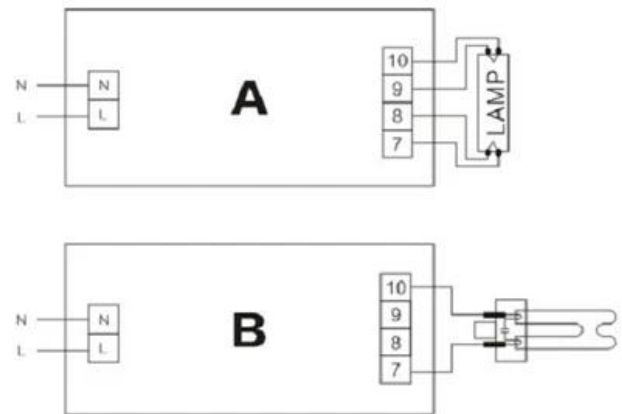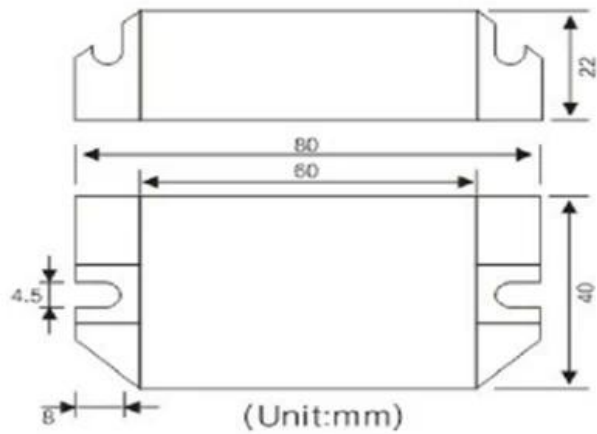

Installation Requirement

IF=5-20mA

Max. cable length between the ballast and the lamp: 1.5m

Mounting Restrictions (For indoor use only)

Disconnect Input Power Before Installing or Servicing

Don't short any two wires of the input and output wires Ballast Case Must Be Grounded